


18 Norway Maple

Acer platanoides



RETAIN

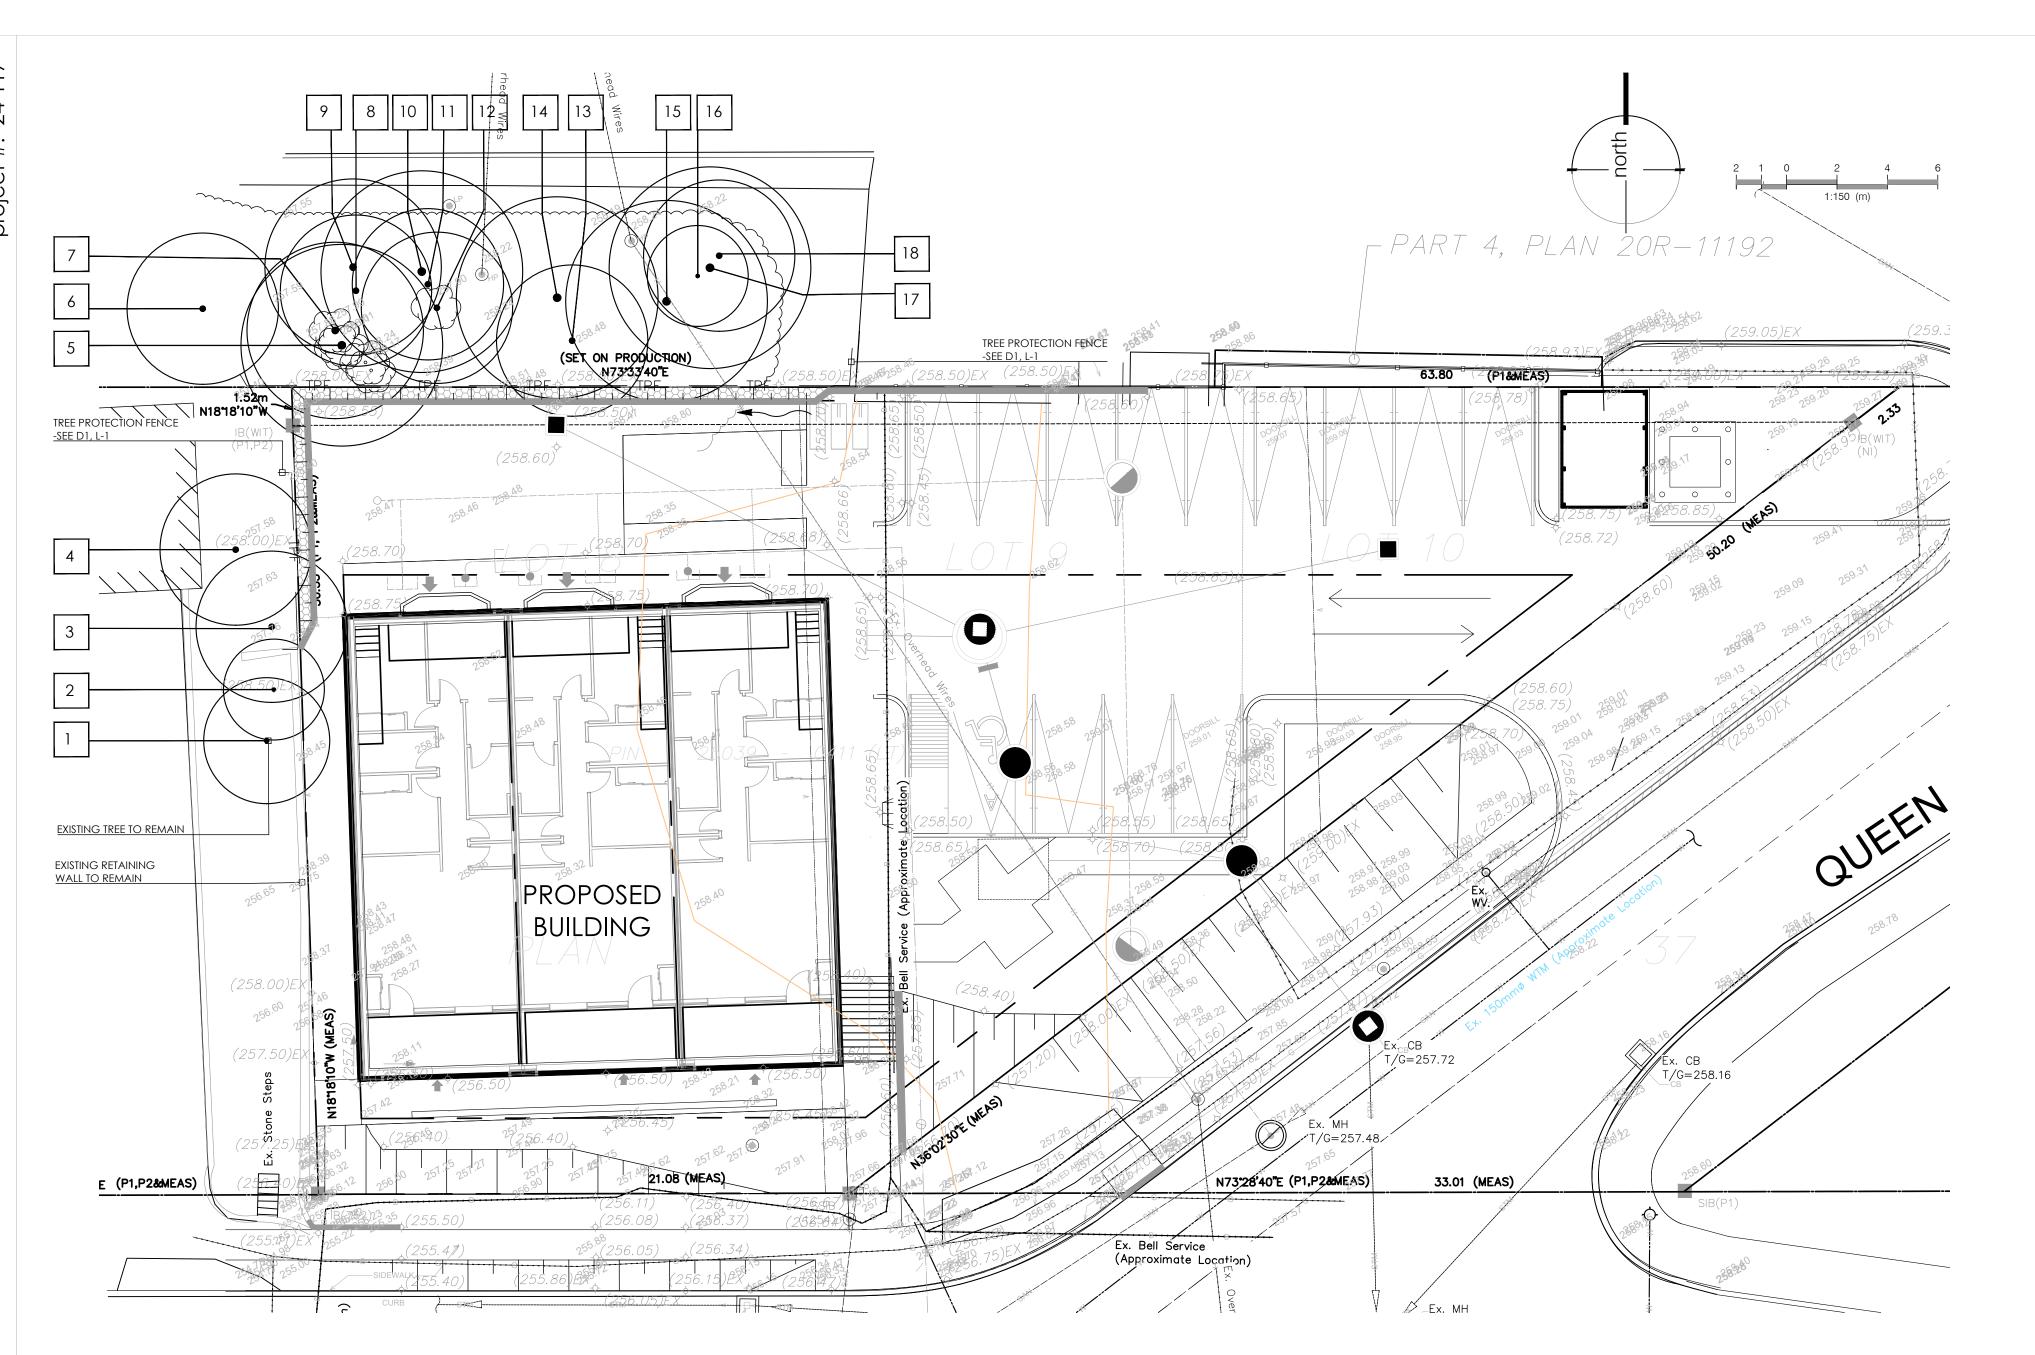



Tree# 1-4 base of trees






Tree #5






Trees #13 - 18

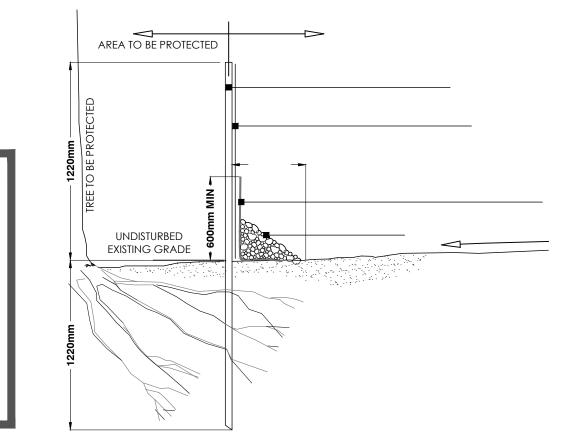

íree #	Common Name	Scientific Name	DBH	TI	CS	CV	Con.	CW	CC	Location	Comments	Action	Reason
1	Black Walnut	Juglans nigra	~15	G	G	G	G	5	2	Neighbouring	Growing below retaining wall	RETAIN	
2	Black Walnut	Juglans nigra	~10	G	G	G	G	4	2	Neighbouring	Growing below retaining wall	RETAIN	
3	Norway Maple	Acer platanoides	~11, 12	F	FG	G	F	6	2	Neighbouring	Union at 0.3 m	RETAIN	
4	Norway Maple	Acer platanoides	~12	G	G	G	G	6	2	Neighbouring		RETAIN	
5	Norway Maple	Acer platanoides	~18	G	G	G	G	6	2	Neighbouring		RETAIN	
6	Norway Maple	Acer platanoides	24	G	G	G	G	7	2	Neighbouring		RETAIN	
7	Norway Maple	Acer platanoides	24, 11	F	FG	G	F	8	2	Neighbouring	Union at ground, seam	RETAIN	
8	Norway Maple	Acer platanoides	18	F	G	Ģ	F	6	2	Neighbouring	Seam, cavity	RETAIN	
9	Norway Maple	Acer platanoides	23	G	FG	G	FG	7	2	Neighbouring		RETAIN	
10	Norway Maple	Acer platanoides	24	G	G	G	G	8	2	Neighbouring		RETAIN	
11	Norway Maple	Acer platanoides	11	G	F	F	F	6	4	Neighbouring	Understorey	RETAIN	
12	Norway Maple	Acer platanoides	19, 10	F	FG	G	F	6	2	Neighbouring	Union at ground	RETAIN	
13	Norway Maple	Acer platanoides	17	G	G	G	G	6	2	Neighbouring		RETAIN	
14	Norway Maple	Acer platanoides	28	G	G	G	G	8	2	Neighbouring		RETAIN	
15	Norway Maple	Acer platanoides	23	G	G	G	G	8	2	Neighbouring		RETAIN	
16	Norway Maple	Acer platanoides	10	G	G	Ģ	G	4	3	Neighbouring		RETAIN	
17	Norway Maple	Acer platanoides	29	G	G	G	G	8	2	Neighbouring	Light lean	RETAIN	

12 G G G G 6 3 Neighbouring

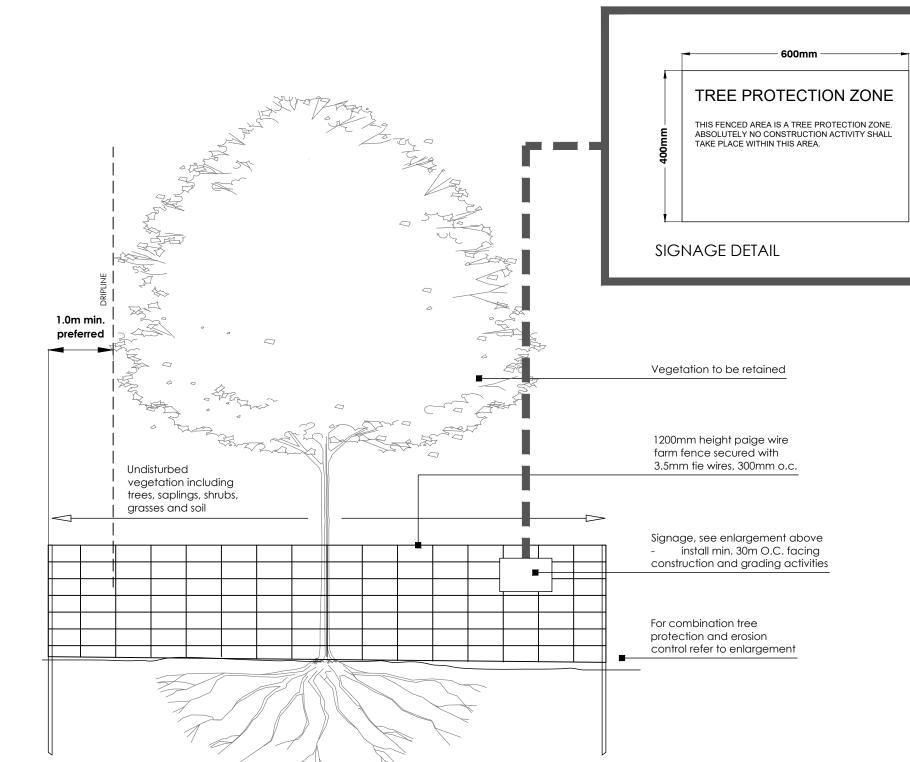

NOTES:


- The area within the dripline of all existing trees shall be properly
- protected with temporary fencing.


 2. The area within the protective fencing shall remain undisturbed with no construction activity, grade changes, surface treatment, compaction, or excavation. Area shall not be used for the storage of building materials or equipment access/storage or project related garbage.
- garbage.

 3. Tree protection measures shall be installed prior to any demolition, tree removal or construction and shall remain until the completion of fine grading and sodding or seeding.

 4. Prune all trees for dead, diseased, weak or hazardous branches only.
- Prune all trees for dead, diseased, weak or hazardous branches only. Also trim back branches which will interfere with construction, prune for structural restoration where necessary.
- 5. No stockpiles and/or excavated material shall be placed within the tree preservation area.6. No rigging cable shall be wrapped around or installed to trees.
- 7. Where root systems of protected trees are exposed directly adjacent to or damaged by construction work they are to be root pruned and the area back filled with topsoil to prevent root desiccation. An Arborist is required to be on site for any injury or cutting to the root system or surface roots of a protected tree.
- 8. Any fine grading within the preservation area is to be done by hand. no heavy equipment is permitted within the preservation zone.
 9. Sediment accumulations to be removed by subdivider/builder when
- sediment deposits reach within 150mm of top of filter fabric barrier.

 10. This detail does not represent any particular tree species.

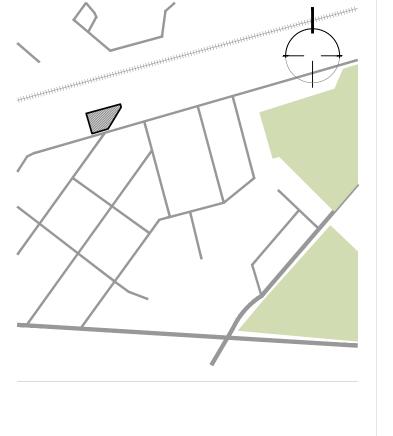


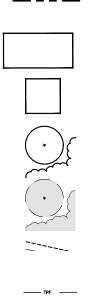








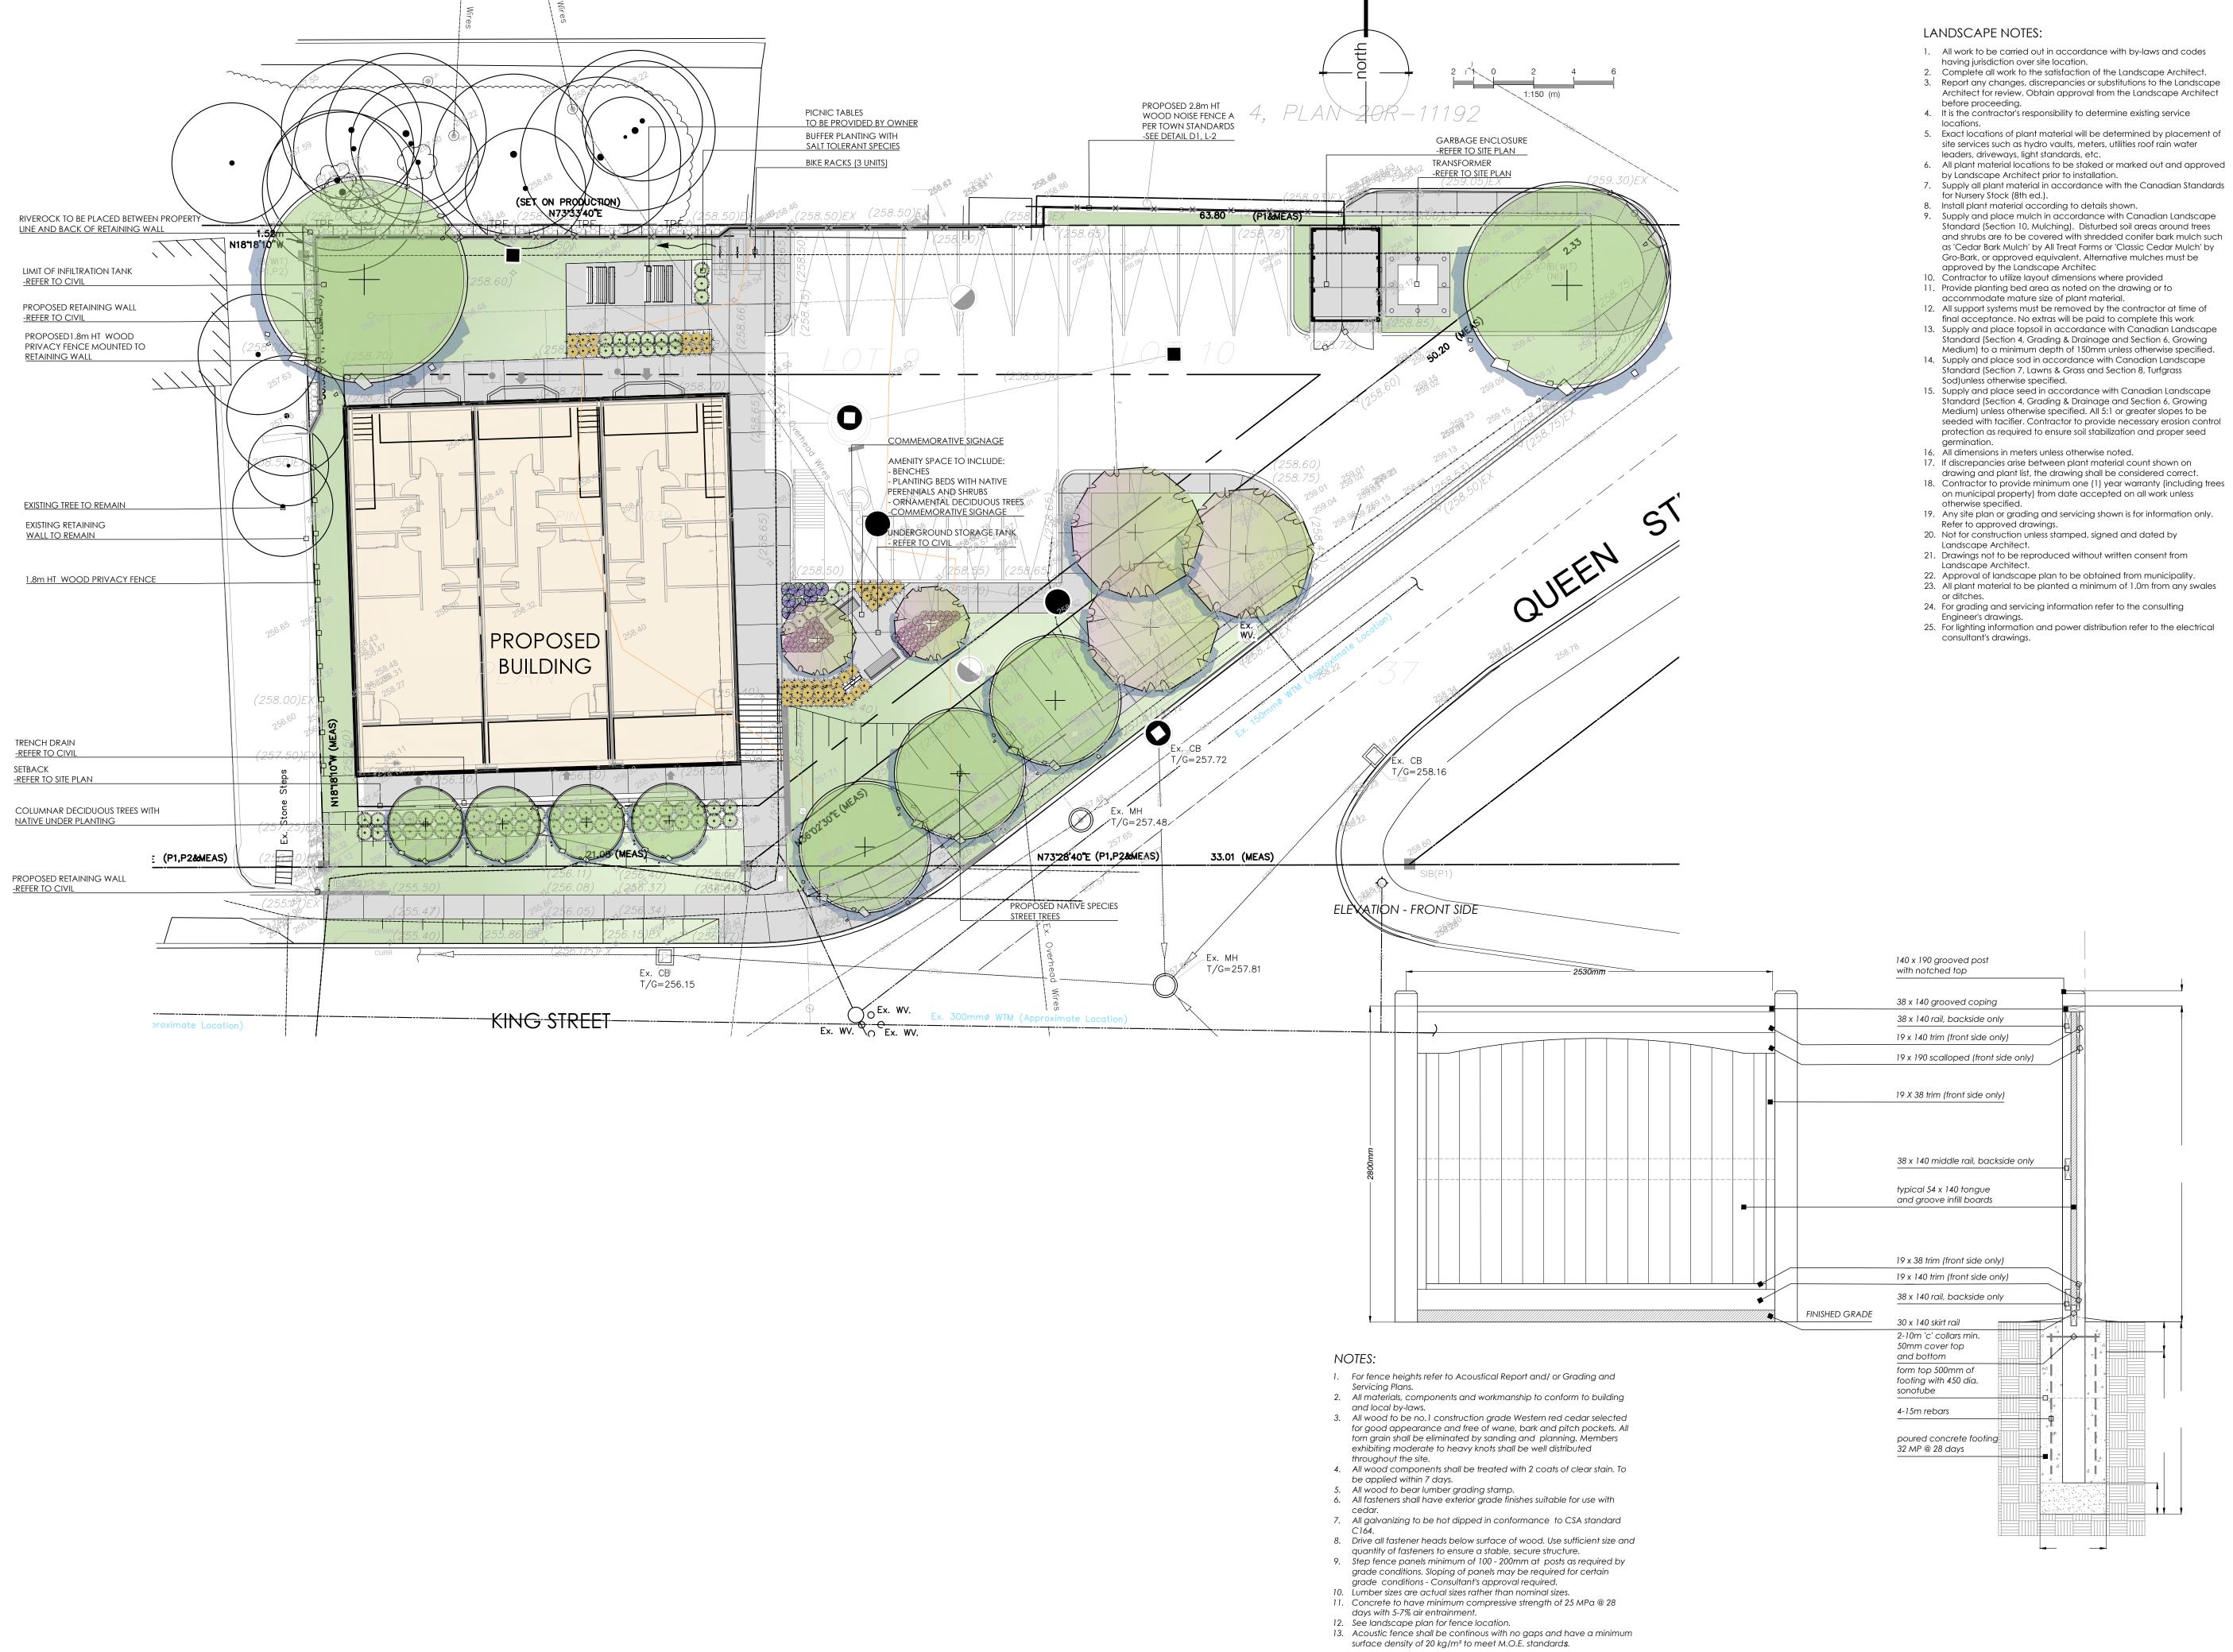

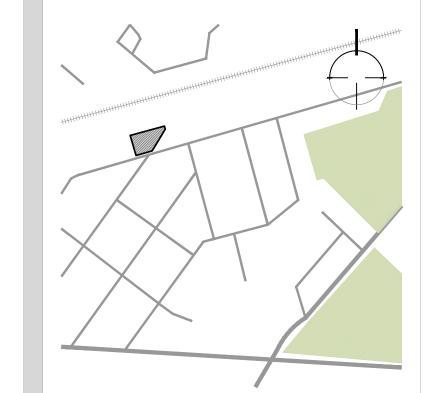

_---

(258.65)-ф-

 \odot





